

ATAM


T-STUKKEN 90°

TES A 90°

TEES 90°

Max. werkdruk: water: 16 bar gas: 10 bar
 Pression service max.: eau : 16 bar gaz: 10 bar
 Working pressure max.: water: 16 bar gas: 10 bar

da	z	L	L3	d	t	d1	SDR	KG/ST/PC	€/ST/PC
20	62.0	110.5	42.5	32.0	36.0	36.0	11-7.4	0.065	12.35
25	66.0	110.5	42.5	37.0	39.5	39.5	11-7.4	0.080	12.35
32	76.0	122.5	47.0	47.0	43.0	43.5	11	0.125	13.56
40	86.0	139.5	50.5	58.5	48.0	47.5	11	0.206	15.68
50	100.5	160.5	58.0	70.0	54.5	52.5	11	0.300	19.76
63	116.0	185.5	64.5	88.0	62.0	60.0	17-11	0.538	22.12
75	128.0	210.5	71.5	97.0	69.0	64.0	17-11	0.650	31.20
90	171.5	293.0	91.0	124.0	76.0	72.5	17-11	1.720	39.43
110	190.0	326.5	101.0	148.5	71.5	85.0	17-11	2.670	63.18
125	215.0	347.5	111.0	170.0	86.0	93.1	17-11	3.700	79.55
160	245.0	370.5	122.0	211.5	85.0	110.5	17-11	6.120	147.35
180	275.0	419.5	130.0	232.0	98.5	123.5	17-11	9.000	256.44
200	302.0	427.0	136.0	264.0	105.0	139.0	17-11	10.980	328.67
225	325.0	479.5	147.0	287.0	110.0	150.0	17-11	13.400	401.81

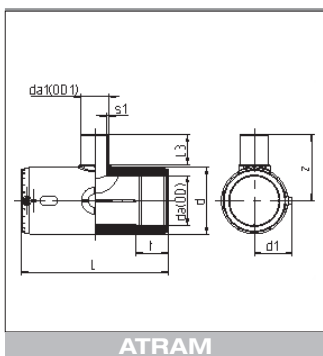

ATRAM

VERLOOP T-STUKKEN 90°

TES REDUITS A 90°

TEES 90° REDUCING

Max. werkdruk: water: 16 bar gas: 10 bar
 Pression service max.: eau : 16 bar gaz: 10 bar
 Working pressure max.: water: 16 bar gas: 10 bar

da	da1	L	L3	s1	z	KG/ST/PC	€/ST/PC
63	50	187.0	58.0	4.6	108	0.042	22.11
90	50	291.5	58.0	4.6	126	1.546	39.43
90	63	291.5	66.0	5.8	134	1.575	39.43
110	63	328.0	66.0	5.8	147	2.388	63.17
110	90	370.5	91.0	8.2	213	2.520	63.17
125	63	347.5	66.0	5.8	157	3.343	79.55
125	90	347.5	91.0	8.2	191	3.466	79.55
125	110	347.5	101.0	10.0	201	3.583	79.55
160	63	370.5	71.5	5.8	179	5.500	147.35
160	90	370.5	91.0	8.2	213	5.611	147.35
160	110	370.5	101.0	10.0	233	5.714	147.35
160	125	370.5	111.0	11.4	233	5.838	147.35